


QUICK RELEASE COUPLING

VE-LOCK

AS PER ISO 7241 TYPE - B

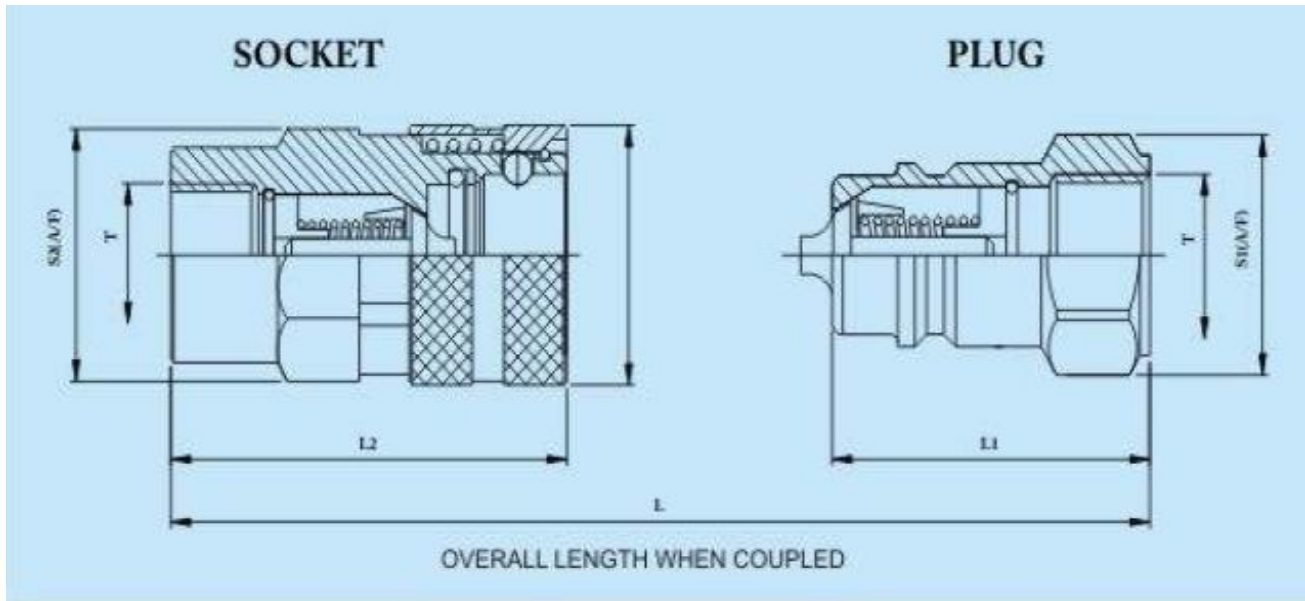

SIZE	VE-LOCK Item	End	DIAMENSIONS IN MM				W.P. = BAR
			L1	L2	L	D	
T	Code	Connection	L1	L2	L	D	W.P. = BAR
1/8"	VE DC 1/8"	Bsp (F) X(F)	44	33	58	23	300
1/4"	VE DC 1/4"	Bsp (F) X(F)	58	40	72	32	300
3/8"	VE DC 3/8"	Bsp (F) X(F)	66	45	80	38	300
1/2"	VE DC 1/2 "	Bsp (F) X(F)	71	50	90	44	250
3/4"	VE DC 3/4 "	Bsp (F) X(F)	77	55	98	48	200
1"	VE DC 1"	Bsp (F) X(F)	85	63	112	58	150
1 1/4"	VE DC 1.25 "	Bsp (F) X(F)	94	65	120	72	150
1 1/2"	VE DC 1.5"	Bsp (F) X(F)	113	80	144	89	150
2"	VE DC 2 "	Bsp (F) X(F)	127	88	152	105	100
2 1/2"	VE DC 2.5 "	Bsp (F) X(F)	132	94	158	118	100
3"	VE DC 3 "	Bsp (F) X(F)	140	103	180	127	100

INBUILT CHECK VALVE IN SOCKET (COUPLER) + PLUG (ADAPTOR) BOTH SIDE

SEALING INSIDE - NBR RING

VE-LOCK